


27C010/020/040/080	Vcc	A18	A17	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	27C010/020/040/080
27C512 (64K x 8)			↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	27C512 (64K x 8)
27C256 (32K x 8)				A14	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	27C256 (32K x 8)
27C128 (16K x 8)				Vcc	A13	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	27C128 (16K x 8)
27C64 (8K x 8)	Vcc	Vcc	n/c			↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	27C64 (8K x 8)
27C32 (4K x 8)			Vcc					A11	↑	↑	↑	↑	↑	↑	↑	27C32 (4K x 8)
27C16 (2K x 8)			Vcc					Vcc								27C16 (2K x 8)
62256 RAM (32K x 8)	Vcc	WE/	A13					A11	↑	↑	↑	↑	↑	↑	↑	62256 RAM (32K x 8)
6264 RAM (8K x 8)	Vcc	WE/	Vcc					A11	↑	↑	↑	↑	↑	↑	↑	6264 RAM (8K x 8)
6116 RAM (2K x 8)			Vcc	A8	A9	WE/	OE/	A10	CE/	D7	D6	D5	D4	D3	6116 RAM (2K x 8)	

Gilderfluke
 & Co.
 ROBOTICS & SOUND SYSTEMS

EPROM/RAM Pin Assignments

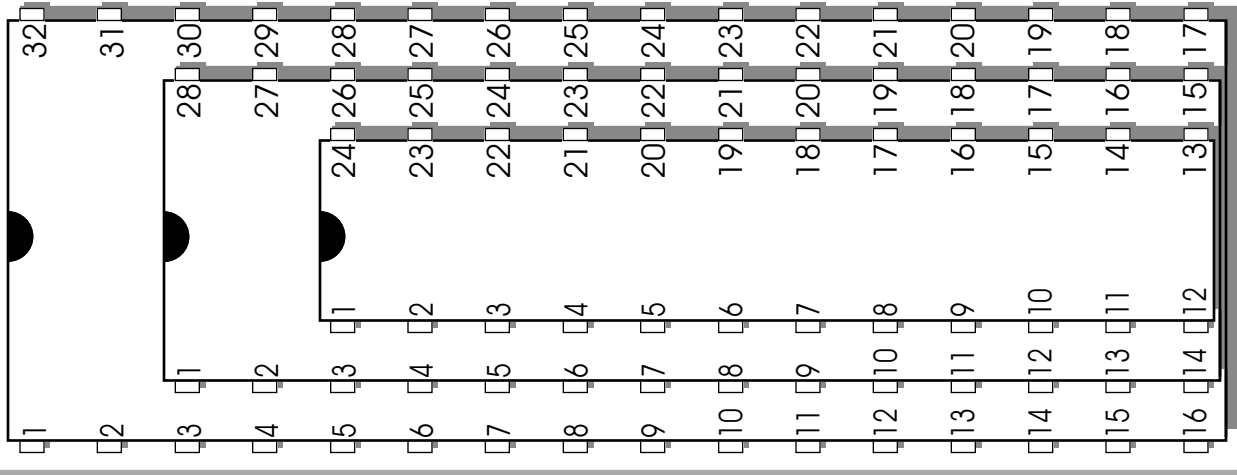

27C010/020/040/080	A15	A16	A19	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	27C010/020/040/080
27C512 (64K x 8)	A15			↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	27C512 (64K x 8)
27C256 (32K x 8)	Vcc			↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	27C256 (32K x 8)
27C128 (16K x 8)	Vcc			↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	27C128 (16K x 8)
27C64 (8K x 8)	A12	Vcc		↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	27C64 (8K x 8)
27C32 (4K x 8)				↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	27C32 (4K x 8)
27C16 (2K x 8)				↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	27C16 (2K x 8)
62256 RAM (32K x 8)	A12	A14		↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	62256 RAM (32K x 8)
6264 RAM (8K x 8)	A12	n/c		↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	6264 RAM (8K x 8)
6116 RAM (2K x 8)				↓	A7	A6	A5	A4	A3	A2	A1	A0	D0	D1	D2	6116 RAM (2K x 8)